

KE38 Spring Plungers



KE38



Features


- The external damping spring has very good compensation for different heights when conveying workpieces.
- Large range of connection threads and lifting heights enables use for a wide variety of applications and suction pads
- Spring damping and soft contact with sensitive workpieces.
- Abrasion resistant guide rod, longer life.
- Optional anti-rotation function.

How to Order?

Series No.	Suction Cup Connection	Lifting Heights	— □ —	Guide Bush Male Thread
KE: External damping spring	38: G3/8	10: 10mm stroke 20: 20mm stroke 30: 30mm stroke 50: 50mm stroke 70: 70mm stroke 75: 75mm stroke 100: 100mm stroke	Blank: standard V: Female thread F: Non rotary	A18: M18X1 A20: M20X1.5

Order Example: KE External Damping Spring Plungers, suction cup connection G3/8, lifting heights stroke 10mm, standard specification, guide bush male thread M18X1. Order code is: KE3810-A18

Main Dimension

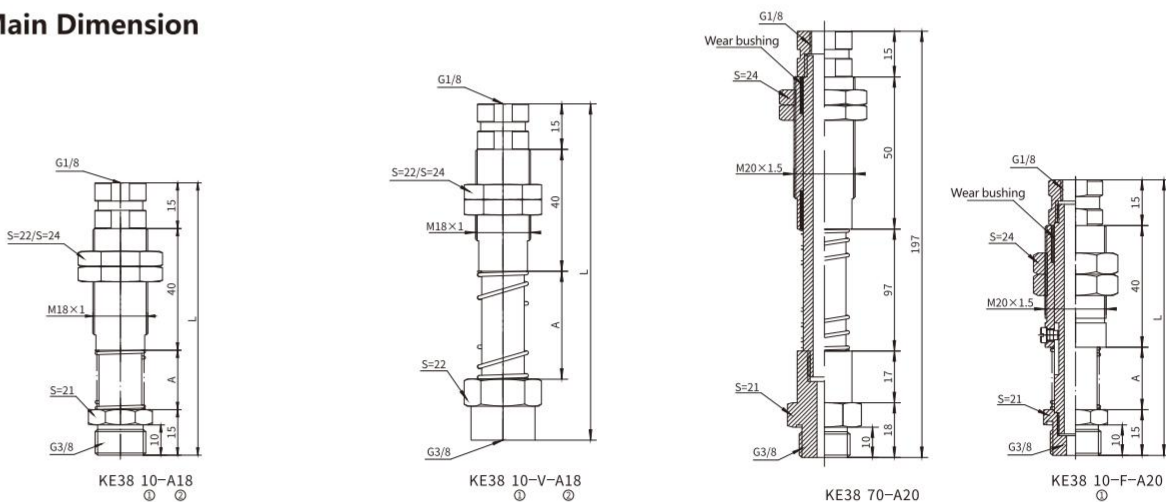

①Lifting Heights	②Guide Bush Size	A	L
10	A18/A20	20.5	90.5
20	A18/A20	35.5	105.5
30	A18/A20	50.5	120.5
50	A18/A20	70.5	140.5
70	A20	90.5	150.5
100	A20	130.5	200.5

A20 has wear-resistant bushing

①Lifting Heights	②Guide Bush Size	A	L
10	A18/A20	20.5	95.5
20	A18/A20	35.5	110.5
30	A18/A20	50.5	125.5
50	A18/A20	70.5	145.5

①Lifting Heights	A	L	①Lifting Heights	A	L
10	20.5	90.5	10	20.5	90.5
20	35.5	105.5	20	35.5	105.5
30	50.5	120.5	30	50.5	120.5
50	70.5	140.5	50	70.5	140.5