

KI38



Features


- The built-in damping spring has very good compensation for different heights when conveying workpieces.
- Large range of connection threads and lifting heights enables use for a wide variety of applications and suction pads.
- Spring damping and soft contact with sensitive workpieces.
- Abrasion resistant guide rod, longer life.

How to Order?


Series No.	Suction Cup Connection	Lifting Heights	□	Guide Bush Male Thread
KI: Internal spring	38: G3/8	10: 10mm stroke 20: 20mm stroke 30: 30mm stroke 50: 50mm stroke	Blank: standard V: Female thread F: Non rotary	A18: M18X1 A20: M20X1.5

Order Example: KI Internal Spring Plungers, suction cup connection G3/8, lifting heights 10mm, standard specification, guide bush male thread M18X1. Order code is: KI3810-A18


Main Dimension

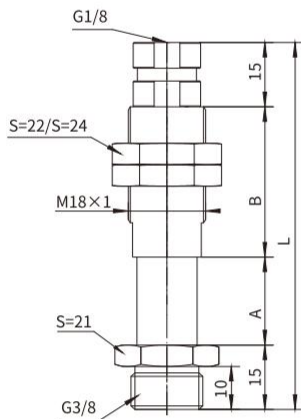

KI38 10-A18

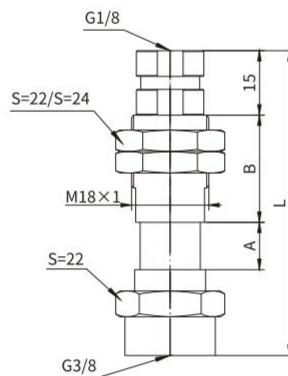

KI38 10-V-A18

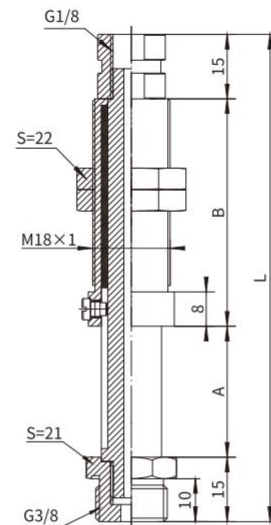

KI38 10-F-A18

①Lifting Heights	②Guide Bush Size	A	B	L
10	A18/A20	10.5	25	65.5
20	A18/A20	20.5	35	85.5
30	A18/A20	30.5	45	105.5
50	A18/A20	50.5	75	155.5

①Lifting Heights	②Guide Bush Size	A	B	L
10	A18/A20	11	25	71
20	A18/A20	21	35	91
30	A18/A20	31	45	111
50	A18/A20	51	75	161

①Lifting Heights	②Guide Bush Size	A	B	L
10	A18/A20	10.5	33	73.5
20	A18/A20	20.5	43	93.5
30	A18/A20	30.5	53	113.5
50	A18/A20	50.5	83	163.5