


EW
F&R



Specifications

Model	EW1000	EW2000	EW3000	EW4000	EW5000
Proof pressure(MPa)	1.5				
Pressure range(MPa)	0.15~1.0				
Pressure adjusting range(MPa)	0.05~0.9				
Filter precision	40 μm(5 μm 可选)				
Working temperature(°C)	-5~60				
Bowl material	Polycarbonate				
Bowl guard	None		Available		
Pressure adjusting range (MPa)	0.15~0.85				
Valve type	With overflow				

Model	Specifications				Accessories	Drain function	Auto drain model
	*Rated flow(L/min)	** Port size (G)	Pressure gauge thread size	Weight (kg)			
EW1000-M5	100	M5	1/16	0.09	B120		
EW2000-01	1200	1/8	1/8	0.35	B220		EW2000-01D
EW2000-02		1/4					EW2000-02D
EW3000-02	2400	1/4	1/8	0.65	B320		EW3000-02D
EW3000-03		3/8					EW3000-03D
EW4000-03	3500	3/8	1/4	1.3	B420		EW4000-03D
EW4000-04		1/2					EW4000-04D
EW4000-06	4500	3/4	1/4	1.38	B420		EW4000-06D
EW5000-06	5000	3/4	1/4	2			EW5000-06D
EW5000-10	5000	1	1/4	2			EW5000-10D


* The above information is based on 8.0 Bar supply pressure and 6.3 Bar set pressure

* NPT,PT port size is optional

Main Dimension

EW1000-EW2000

EW3000-EW5000

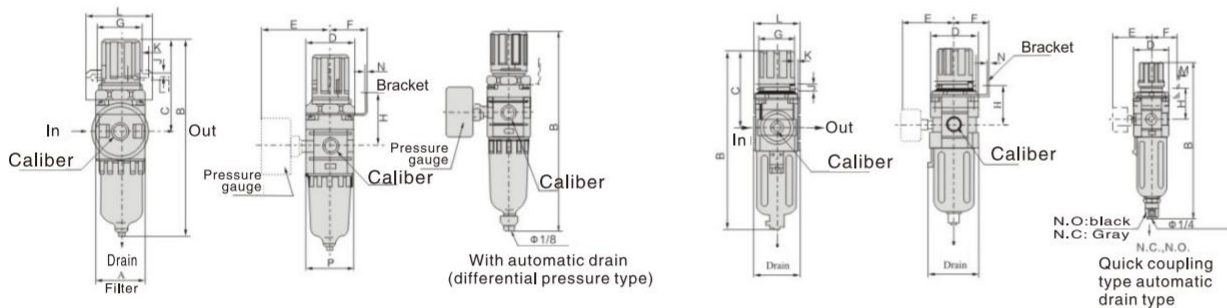

Model	Caliber	A	B	C	D	E	F	G	H	J	K	L	M	N	P	with auto-drainer
																B
EW1000-M5	M5x0.8	25	108	50.5	25	33.5	25	28	30	4.5	6.5	40	1.8	18.5	25	127
EW2000-01/02	1/8 · 1/4	40	160	74	40	53	33	33.5	43	5.5	15	55	1.8	33.5	40	181
EW3000-02/03	1/4 · 3/8	53	207	89	53	54.5	41	36	47	6.5	11.5	54	1.8	42.5	55	245
EW4000-03/04	3/8 · 1/2	70	259	109	70	60	49	53	52	8.5	10.5	70	1.8	52.5	72	276
EW4000-06	3/4	75	263	111	70	66	49	53	56	8.5	10.5	70	1.8	52.5	72	281
EW5000-06/10	3/4 · 1	90	339	117	90	70	49	53	62	8.5	10.5	70	1.8	52.5	-	356