

KE14



Features


- The external damping spring has very good compensation for different heights when conveying workpieces.
- Large range of connection threads and lifting heights enables use for a wide variety of applications and suction pads
- Spring damping and soft contact with sensitive workpieces.
- Abrasion resistant guide rod, longer life.
- Optional anti-rotation function.

How to Order?

Series No.	Suction Cup Connection	Lifting Heights	— □ —	Guide Bush Male Thread
KE: External damping spring	14: G1/4	10: 10mm stroke 20: 20mm stroke 25: 25mm stroke 30: 30mm stroke 50: 50mm stroke 70: 70mm stroke 75: 75mm stroke	Blank: standard V: Female thread F: Non rotary	A18: M18X1 A20: M20X1.5

Order Example KE External Damping Spring Plungers, suction cup connection G1/4, lifting heights stroke 10mm, standard specification, guide bush male thread M18X1. Order code is: KE1410-A18

Main Dimension

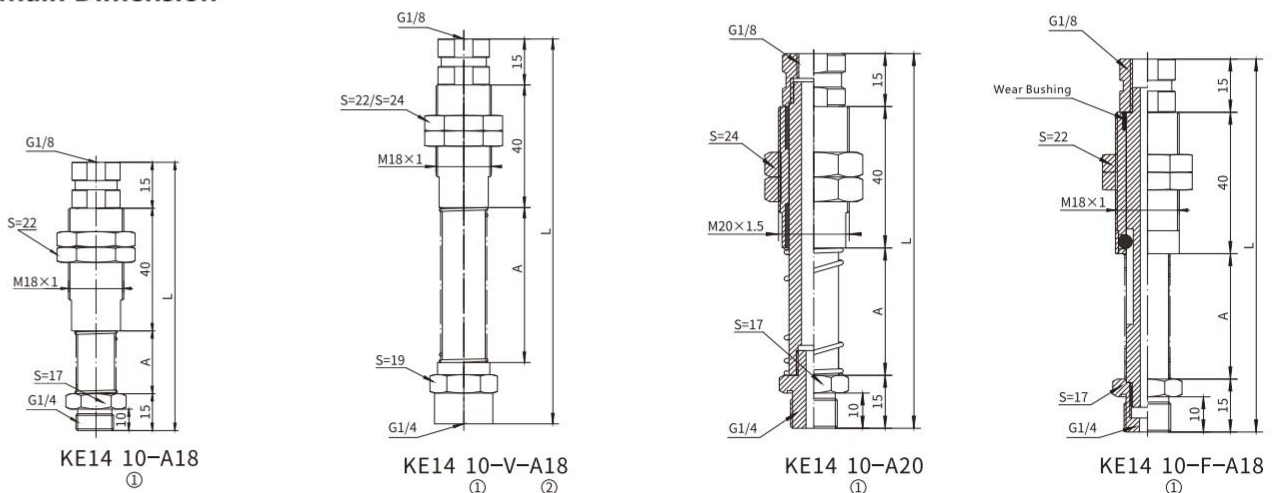

①Lifting Heights	A	L
10	20.5	90.5
20	35.5	105.5
30	50.5	120.5
50	70.5	140.5

①Lifting Heights	②Guide Bush Size	A	L
10	A18/20	20.5	90.5
20	A18/20	35.5	105.5
30	A18/20	50.5	120.5
50	A18/20	70.5	140.5

①Lifting Heights	A	L
10	20.5	90.5
20	35.5	105.5
30	50.5	120.5
50	70.5	140.5
70	90.5	160.5

①Lifting Heights	A	L
10	20.5	90.5
20	35.5	105.5
30	50.5	120.5
50	70.5	140.5