

KE38



Features

- The external damping spring has very good compensation for different heights when conveying workpieces.
- Large range of connection threads and lifting heights enables use for a wide variety of applications and suction pads
- Spring damping and soft contact with sensitive workpieces.
- Abrasion resistant guide rod, longer life.
- Optional anti-rotation function.


Specifications

KE 38 10 - □ - A18

① ② ③ ④ ⑤

①Series	②Suction Cup Connection	③Lifting Heights	④Specifications Way	⑤Guide Bush Male Thread
KE-External damping spring	38-G3/8	10-10mm stroke 20-20mm stroke 30-30mm stroke 50-50mm stroke 70-70mm stroke 75-75mm stroke 100-100mm stroke	Blank-standard V-Female thread F-Non rotary	A18-M18X1 A20-M20X1.5

Main Dimension

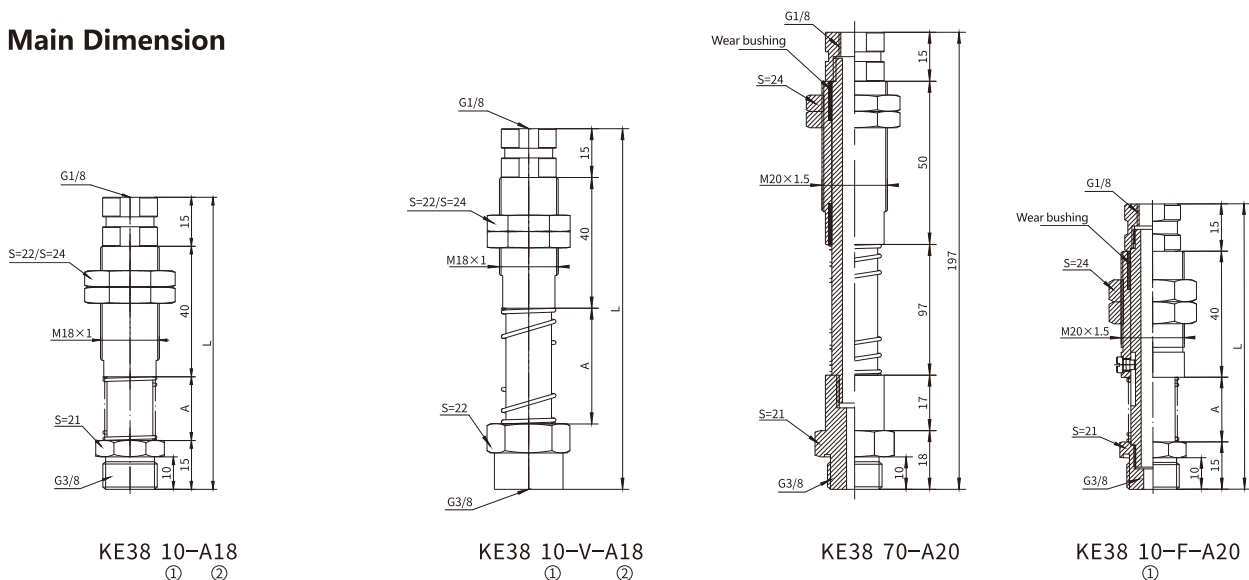

①Lifting Heights	②Guide Bush Size	A	L	①Lifting Heights	②Guide Bush Size	A	L	①Lifting Heights	A	L
10	A18/A20	20.5	90.5	10	A18/A20	20.5	95.5	10	20.5	90.5
20	A18/A20	35.5	105.5	20	A18/A20	35.5	110.5	20	35.5	105.5
30	A18/A20	50.5	120.5	30	A18/A20	50.5	125.5	30	50.5	120.5
50	A18/A20	70.5	140.5	50	A18/A20	70.5	145.5	50	70.5	140.5
70	A20	90.5	150.5							
100	A20	130.5	200.5							

A20 has wear-resistant bushing