

SZP2-T/X Heavy Duty Rotating with Buffer



SZP2-T/X

Heavy Duty Rotating with Buffer




How to Order?

Series No.	Stent Model	Pad Diameter	Pad Model	Pad Material	JB 缓冲行程
SZP2:	F: Rotating Model	32: Ø32 80: Ø80		N: NBR	25
SZP Series		40: Ø40 100: Ø100		S: Silicone Rubber	50
		50: Ø50 125: Ø125			75
		63: Ø63			100
	T: Vertical X: Lateral		H: Heavy Duty Model HB: Heavy Duty Bellows Type		

Order Example: SZP2 series heavy duty rotating vacuum pad with buffer, direction vertical, rotating model, diameter $\phi 40$, heavy duty model, silicone rubber, stroke 25. ERP code is SZP2-TF40HN-25.

Rotating Bracket with Buffer Size

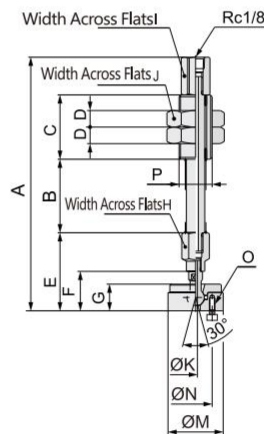


Model	A	B	C	D	E	F	G	H	I	J	K	M	N	O	P
SZP2B-TF0JB25	138	40	35	9	42.5	21.5	14.5	13	14	27	2	30	14	3-M2.5X0.45	M14X1.0
SZP2B-TF0JB50	173	75													
SZP2B-TF0JB75	209	111													
SZP2B-TF1JB25	138	40	50	9.5	54.5	28.5	19	17	17	30	4	50	34	4-M4X0.7	
SZP2B-TF2JB25	172.5	44													
SZP2B-TF2JB50	208.5	80													
SZP2B-TF2JB75	248.5	120	50	9.5	55.5	29.5	20	17	17	30	4	70	40	4-M5X0.8	
SZP2B-TF2JB100	283.5	155													
SZP2B-TF3JB25	173.5	44													
SZP2B-TF3JB50	209.5	80													
SZP2B-TF3JB75	249.5	120													
SZP2B-TF3JB100	284.5	155													

SZP2-T/X
with Buffer


SZP2-T/X Heavy Duty Rotating with Buffer

Rotating Bracket with Buffer Size

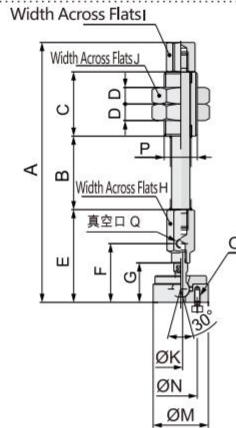

Model	A	B	C	D	E	F	G	H	I	J	K	M	N	O	P	Q
SZP2B-XF0JB25	141.5	40	35	9	42.5	21.5	14.5	13	14	27	2	30	14	3-M2.5X0.45	M14X1.0	M5X0.8
SZP2B-XF0JB50	176.5	75														
SZP2B-XF0JB75	212.5	111														
SZP2B-XF1JB25	141.5	40														
SZP2B-XF1JB50	176.5	75														
SZP2B-XF1JB75	212.5	111	50	9.5	54.5	28.5	19	17	17	30	4	50	34	4-M4X0.7	M16X1.5	Rc1/8
SZP2B-XF2JB25	182.5	44														
SZP2B-XF2JB50	218.5	80														
SZP2B-XF2JB75	258.5	120														
SZP2B-XF2JB100	293.5	155														
SZP2B-XF3JB25	182.5	44														
SZP2B-XF3JB50	218.5	80														
SZP2B-XF3JB75	258.5	120														
SZP2B-XF3JB100	293.5	155														

Rotating Bracket with Buffer Size




Model	A	B	C	D	E	F	G	H	I	Ø	Replace The Support Model.
SZP2-TF32H□JB25	146	40	35	9	42.5	13	27	M18X1.5	14	2	SZP2B-TF0JB25
SZP2-TF32H□JB50	181	75									SZP2B-TF0JB50
SZP2-TF32H□JB75	217	111									SZP2B-TF0JB75
SZP2-TF40H□JB25	149.5	40									SZP2B-TF1JB25
SZP2-TF40H□JB50	184.5	75									SZP2B-TF1JB50
SZP2-TF40H□JB75	220.5	111	SZP2B-TF1JB75								
SZP2-TF50H□JB25	149.5	40	50	9.5	54.5	17	30	M22X1.5	17	4	SZP2B-TF1JB25
SZP2-TF50H□JB50	184.5	75									SZP2B-TF1JB50
SZP2-TF50H□JB75	220.5	111									SZP2B-TF1JB75
SZP2-TF63H□JB25	187	44									SZP2B-TF2JB25
SZP2-TF63H□JB50	223	80									SZP2B-TF2JB50
SZP2-TF63H□JB75	263	120									SZP2B-TF2JB75
SZP2-TF63H□JB100	298	155									SZP2B-TF2JB100
SZP2-TF80H□JB25	189	44									SZP2B-TF2JB25
SZP2-TF80H□JB50	225	80									SZP2B-TF2JB50
SZP2-TF80H□JB75	265	120									SZP2B-TF2JB75
SZP2-TF80H□JB100	300	155	SZP2B-TF2JB100								
SZP2-TF100H□JB25	194.5	44	50	9.5	55.5	17	30	M22X1.5	17	4	SZP2B-TF3JB25
SZP2-TF100H□JB50	230.5	80									SZP2B-TF3JB50
SZP2-TF100H□JB75	270.5	120									SZP2B-TF3JB75
SZP2-TF100H□JB100	305.5	155									SZP2B-TF3JB100
SZP2-TF125H□JB25	194.5	44									SZP2B-TF3JB25
SZP2-TF125H□JB50	230.5	80									SZP2B-TF3JB50
SZP2-TF125H□JB75	270.5	120									SZP2B-TF3JB75
SZP2-TF125H□JB100	305.5	155									SZP2B-TF3JB100

SZP2-T/X
with Buffer


SZP2-T/X Heavy Duty Rotating with Buffer



Rotating Bracket with Buffer Size

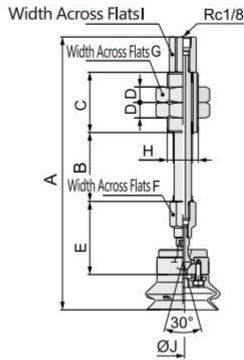

Model	A	B	C	D	E	F	G	H	I	ØJ	Replace The Support Model
SZP2-TF32HB□JB25	156.5	40									SZP2B-TF0JB25
SZP2-TF32HB□JB50	191.5	75									SZP2B-TF0JB50
SZP2-TF32HB□JB75	227.5	111									SZP2B-TF0JB75
SZP2-TF40HB□JB25	58.5	40									SZP2B-TF1JB25
SZP2-TF40HB□JB50	193.5	75	35	9	42.5	13	27	M18X1.5	14	2	SZP2B-TF1JB50
SZP2-TF40HB□JB75	229.5	111									SZP2B-TF1JB75
SZP2-TF50HB□JB25	158.5	40									SZP2B-TF1JB25
SZP2-TF50HB□JB50	193.5	75									SZP2B-TF1JB50
SZP2-TF50HB□JB75	229.5	111									SZP2B-TF1JB75
SZP2-TF63HB□JB25	204	44									SZP2B-TF2JB25
SZP2-TF63HB□JB50	240	80									SZP2B-TF2JB50
SZP2-TF63HB□JB75	280	120									SZP2B-TF2JB75
SZP2-TF63HB□JB100	315	155			54.5						SZP2B-TF2JB100
SZP2-TF80HB□JB25	209.5	44									SZP2B-TF2JB25
SZP2-TF80HB□JB50	245.5	80									SZP2B-TF2JB50
SZP2-TF80HB□JB75	285.5	120									SZP2B-TF2JB75
SZP2-TF80HB□JB100	320.5	155									SZP2B-TF2JB100
SZP2-TF100HB□JB25	221	44	50	9.5		17	30	M22X1.5	17	4	SZP2B-TF3JB25
SZP2-TF100HB□JB50	257	80									SZP2B-TF3JB50
SZP2-TF100HB□JB75	297	120									SZP2B-TF3JB75
SZP2-TF100HB□JB100	332	155			55.5						SZP2B-TF3JB100
SZP2-TF125HB□JB25	229.5	44									SZP2B-TF3JB25
SZP2-TF125HB□JB50	265.5	80									SZP2B-TF3JB50
SZP2-TF125HB□JB75	305.5	120									SZP2B-TF3JB75
SZP2-TF125HB□JB100	340.5	155									SZP2B-TF3JB100

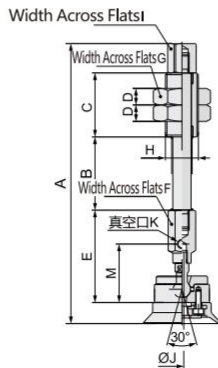


Model	A	B	C	D	E	F	G	H	I	ØJ	K	E	Replace The Support Model
SZP2-XF32H□JB25	149.5	40											SZP2B-XF0JB25
SZP2-XF32H□JB50	184.5	75											SZP2B-XF0JB50
SZP2-XF32H□JB75	220.5	111											SZP2B-XF0JB75
SZP2-XF40H□JB25	153	40											SZP2B-XF1JB25
SZP2-XF40H□JB50	188	75	35	9	42.5	13	27	M18X1.5	14	2	M5X0.8	32	SZP2B-XF1JB50
SZP2-XF40H□JB75	224	111											SZP2B-XF1JB75
SZP2-XF50H□JB25	153	40											SZP2B-XF1JB25
SZP2-XF50H□JB50	188	75											SZP2B-XF1JB50
SZP2-XF50H□JB75	224	111											SZP2B-XF1JB75
SZP2-XF63H□JB25	197	44											SZP2B-XF2JB25
SZP2-XF63H□JB50	233	80											SZP2B-XF2JB50
SZP2-XF63H□JB75	273	120											SZP2B-XF2JB75
SZP2-XF63H□JB100	308	155			54.5							45	SZP2B-XF2JB100
SZP2-XF80H□JB25	199	44											SZP2B-XF2JB25
SZP2-XF80H□JB50	235	80											SZP2B-XF2JB50
SZP2-XF80H□JB75	275	120											SZP2B-XF2JB75
SZP2-XF80H□JB100	310	155											SZP2B-XF2JB100
SZP2-XF100H□JB25	204.5	44	50	9.5		17	30	M22X1.5	17	4	Rc1/8	46	SZP2B-XF3JB25
SZP2-XF100H□JB50	240.5	80											SZP2B-XF3JB50
SZP2-XF100H□JB75	280.5	120											SZP2B-XF3JB75
SZP2-XF100H□JB100	315.5	155			55.5								SZP2B-XF3JB100
SZP2-XF125H□JB25	204.5	44											SZP2B-XF3JB25
SZP2-XF125H□JB50	240.5	80											SZP2B-XF3JB50
SZP2-XF125H□JB75	280.5	120											SZP2B-XF3JB75
SZP2-XF125H□JB100	315.5	155											SZP2B-XF3JB100

6
SZP2-T/X
with Buffer

SZP2-T/X Heavy Duty Rotating with Buffer

Rotating Bracket with Buffer Size

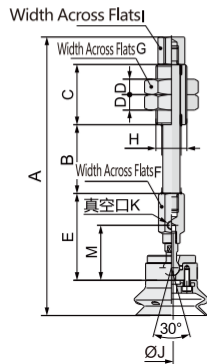

Model	A	B	C	D	E	F	G	H	I	ØJ	K	E	Replace The Support Model
SZP2-XF32HB□JB25	160	40											SZP2B-XF0JB25
SZP2-XF32HB□JB50	195	75											SZP2B-XF0JB50
SZP2-XF32HB□JB75	231	111											SZP2B-XF0JB75
SZP2-XF40HB□JB25	162	40											SZP2B-XF1JB25
SZP2-XF40HB□JB50	197	75	35	9	42.5	13	27	M18X1.5	14	2	M5X0.8	32	SZP2B-XF1JB50
SZP2-XF40HB□JB75	233	111											SZP2B-XF1JB75
SZP2-XF50HB□JB25	165.5	40											SZP2B-XF1JB25
SZP2-XF50HB□JB50	200.5	75											SZP2B-XF1JB50
SZP2-XF50HB□JB75	236.5	111											SZP2B-XF1JB75
SZP2-XF63HB□JB25	214	44											SZP2B-XF2JB25
SZP2-XF63HB□JB50	250	80											SZP2B-XF2JB50
SZP2-XF63HB□JB75	290	120											SZP2B-XF2JB75
SZP2-XF63HB□JB100	325	155											SZP2B-XF2JB100
SZP2-XF80HB□JB25	219.5	44			54.5							45	SZP2B-XF2JB25
SZP2-XF80HB□JB50	255.5	80											SZP2B-XF2JB50
SZP2-XF80HB□JB75	295.5	120											SZP2B-XF2JB75
SZP2-XF80HB□JB100	330.5	155											SZP2B-XF2JB100
SZP2-XF100HB□JB25	231	44	50	9.5		17	30	M22X1.5	17	4	Rc1/8		SZP2B-XF3JB25
SZP2-XF100HB□JB50	267	80											SZP2B-XF3JB50
SZP2-XF100HB□JB75	307	120											SZP2B-XF3JB75
SZP2-XF100HB□JB100	342	155											SZP2B-XF3JB100
SZP2-XF125HB□JB25	239.5	44			55.5							46	SZP2B-XF3JB25
SZP2-XF125HB□JB50	275.5	80											SZP2B-XF3JB50
SZP2-XF125HB□JB75	315.5	120											SZP2B-XF3JB75
SZP2-XF125HB□JB100	350.5	155											SZP2B-XF3JB100